


MSFET - USB

USB interface for the MSFET3330 and MSFET334x

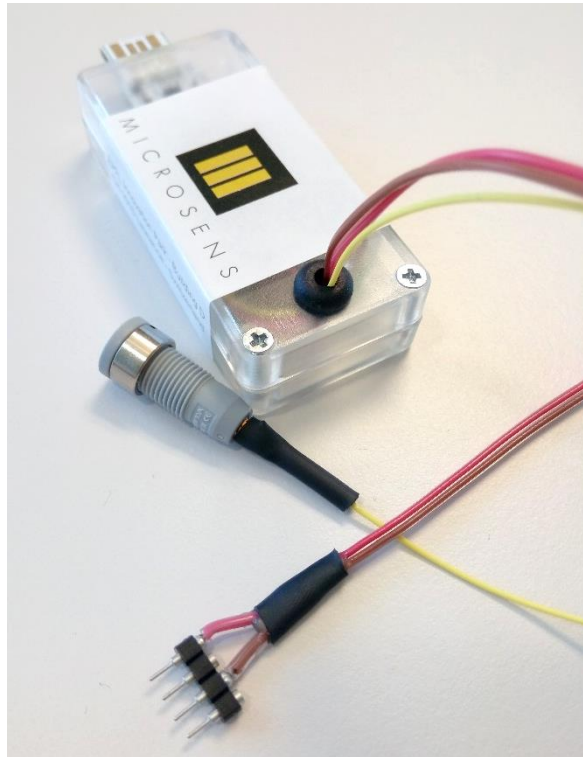

Key Features

- Small packaging (40mm x 70mm)
- USB powered (galvanic isolation of in- and outputs)
- Digital sensor output
- pH calibration function
- Graphical user interface (Java)

Applications

- Laboratory
- Water quality monitoring
- Environment control
- Security and industrial process control

Characteristics

- Temperature range: 0°C ... 80°C
- USB powered (galvanic isolation)
- pH calibration function
- Digital output of sensor output (raw data) and measured pH
- Data transfer via USART bus (2 wires)