


MSG5-5000i

MICROSENS Semiconductor Gas Sensor


Sensor Description

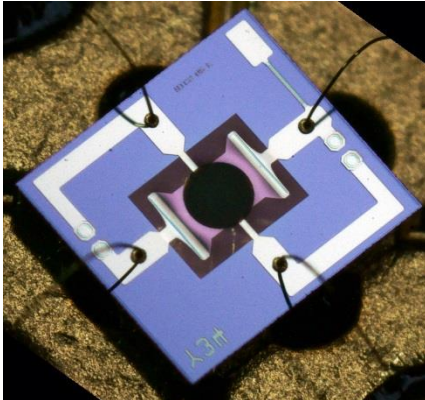

- MSG5-5000i integrated semi-conductor gas sensors manufactured using standard microelectronic technology and silicon micromachining techniques.
- Detection of reducing gases such as carbon monoxide (CO), hydrocarbons (HC), ethanol, and volatile organic compounds (VOC).
- The sensitive element consists of a semiconducting metal oxide layer. The measurement of specific oxidizing or reducing gases is based on a reversible conductivity change of the sensing element at an appropriate working temperature.
- The thin semiconducting metal oxide is deposited on an integrated heater. The sensitive area is thermally insulated from the silicon substrate to minimize electrical power consumption.

Packaging and Dimensions

- Chip size: ~2mm x 2mm
- Sensitive area: $\varnothing \sim 300\mu\text{m}$
- Chip thickness: ~300 μm
- SMD package: 5.1 x 7.6 x 2mm



Key Features and Applications

Applications

- Indoor air quality
- Industrial process control
- Combustion control
- Environmental monitoring
- Security:
 - Toxic gases
 - Explosive gases

Key Features

- Small footprint for compact designs
- Robust MEMS sensor for harsh environments
- High-volume manufacturing for low-cost applications
- Short lead-times

Detectable Gases

- CO: 1 – 1000ppm
- C₂H₅OH: 10 – 500ppm
- H₂: 1 – 1000ppm
- NH₃: 1 – 500ppm
- CH₄: >1000ppm